

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
15 April 2004 (15.04.2004)

PCT

(10) International Publication Number
WO 2004/032159 A1

- (51) International Patent Classification⁷: **H01F 27/32**, 27/36, 5/02, 27/08
- (21) International Application Number: PCT/CH2002/000545
- (22) International Filing Date: 1 October 2002 (01.10.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **DELTA ENERGY SYSTEMS (SWITZERLAND) AG** [CH/CH]; Freiburgstrasse 251, CH-3018 Bern Bümpliz (CH).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **PILNIAK, Jürgen** [DE/DE]; Udenstrasse 11, 59581 Warstein/Allagen (DE).
- (74) Agents: **ROSHARDT, Werner, A. et al.**; Keller & Partner Patentanwälte AG, Schmiedenplatz 5, Postfach, CH-3000 Bern (CH).
- (81) Designated State (national): US.
- (84) Designated States (regional): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: COIL FORM

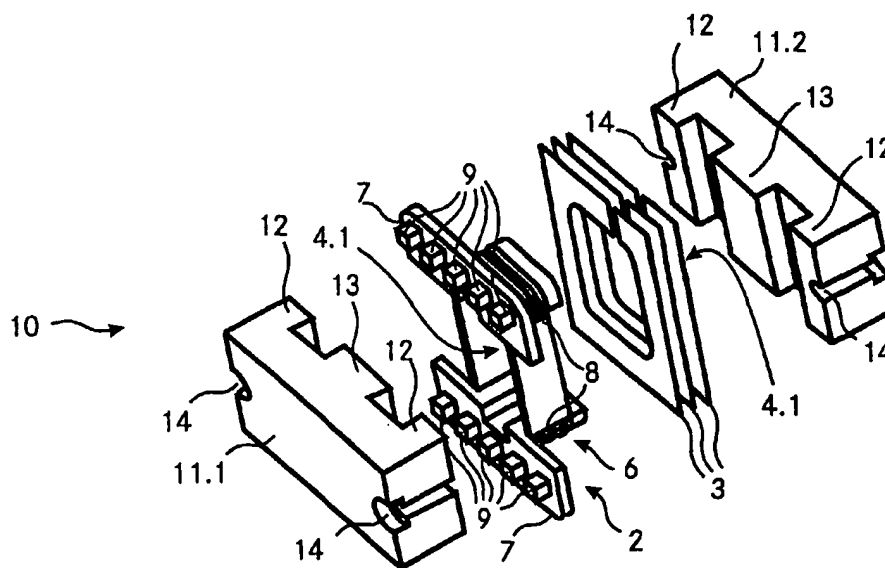

(57) Abstract: A coil form for forming an inductive element (10) includes a coil body (2) and at least one, for example three separating plates (3). The coil body (2) has an opening (4.1) and includes two portions, a coil portion (6) and a flange portion (7). To put the inductive element (10) together, the separating plates (3) are pushed over the coil portion (6) of the coil body (2). For positioning of the separating plates (3), recesses (8) are provided on the surface of the coil portion (6). The separating plates (3) divide the surface of the coil portion (2) into a plurality of coil areas where the coil or the coils of the inductive component (10) can be provided, for example by winding an isolated wire around the coil portion (6) in a coil area. Afterwards, the core of the inductive component is installed by fitting the two E-shaped core parts (11.1, 11.2) together such that the middle leg (13) of each core part (11.1, 11.2) is inserted into the opening (4.1) of the core body (2).

WO 2004/032159 A1